

Fig. 1


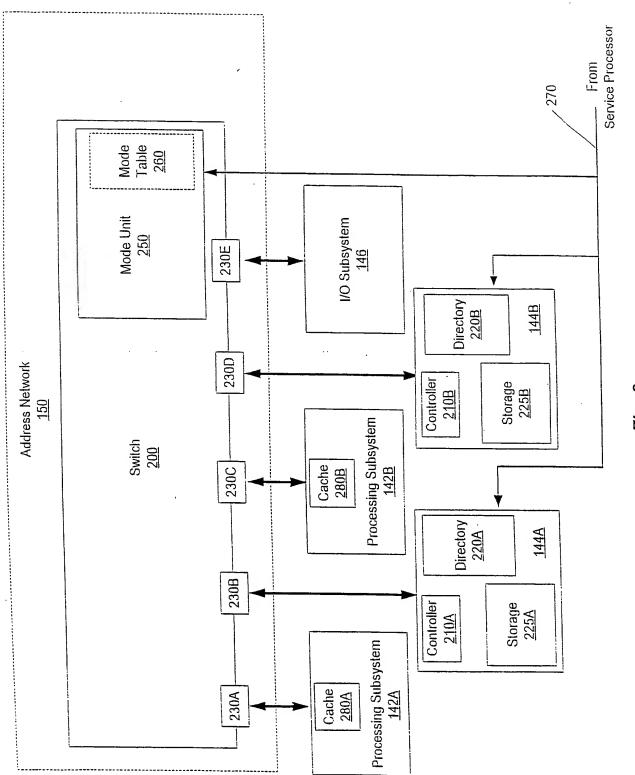


Fig. 2



	ADDRESS RANGE 502	HOME <u>504</u>	MODE 506
510A	А	CLIENT 3	PTP
510B	В	CLIENT 3	ВС
510C	С	CLIENT 1	PTP
510D	D	CLIENT 4	PTP
510E	E	CLIENT 3	ВС
510F	F	CLIENT 2	BC
510G	G	CLIENT 5	PTP
	•	•	•
	•	•	•

Fig. 3

OWNER <u>614</u>	CLIENT 3	CLIENT 3	CLIENT 3	CLIENT 1	NONE	CLIENT 3	CLIENT 4		• .
CLIENT 5 <u>612</u>		_	_	-	-				
CLIENT 4 <u>610</u>		_	-	S	S	_	Σ	·	
CLIENT 3 <u>608</u>	M	M	Σ	S	S	0			
CLIENT 2 <u>606</u>	_	<u>-</u>		_				•	
CLIENT 1 <u>604</u>				0	S	S			
ADDRESS 602	Aa	Ab	Ac	Ad	Ae	Af	Ag		
	V003	0200 6200	0200	2020	- C020	620F	6206		

				;	i			
CLIENT 3	CLIENT 3	CLIENT 3	CLIENT 1	NONE	CLIENT 3	CLIENT 4		
_			-			_		
_	_		~	œ		X		•
M	Μ	M	æ		S.			
	<del></del>			_	-			
	_	-	æ	R	æ			•
Aa	Ab	Ac	Ad	Ae	Af	Ag		
	- M	M		& &	W W	& & & & & & & & & & & & & & & & &	& &	& & &

~ 220B

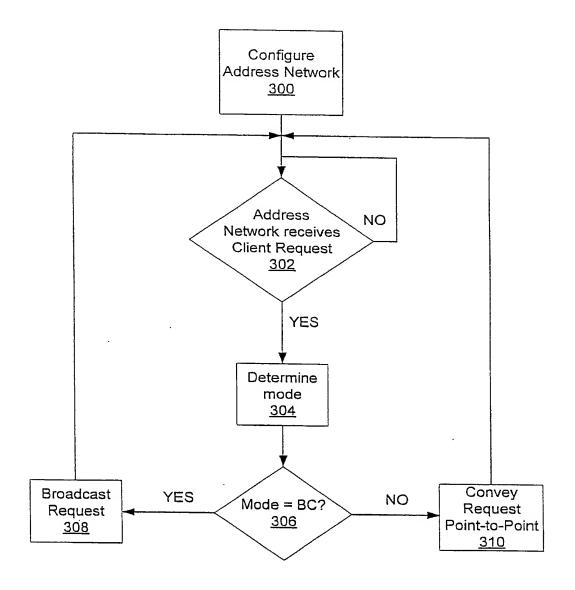


Fig. 5

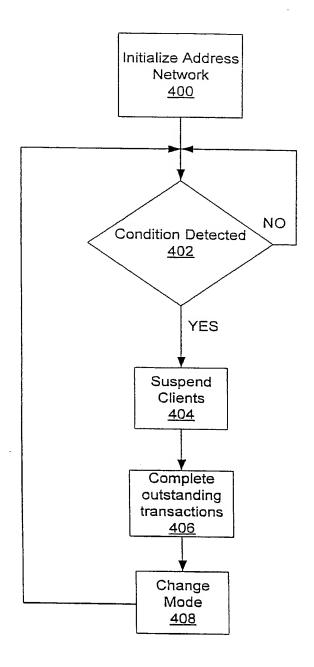


Fig. 6

Packet		Address Sp	ace	
Туре	Full Name	Cacheable	1/0	Description
RTS	ReadToShare	Υ		Requests read-only copy of cache line
RTO	ReadToOwn	Υ		Requests writable copy of cache line
RTWB	ReadToWriteBack	Υ		Requests to receive writable copy of cache line and send cache line to memory
RS	ReadStream	Υ		Request read-once copy of cache line
WS	WriteStream	Υ		Request to write entire cache line and send to memory
WB	WriteBack	Υ		Request to send cache line from owning device to memory, device does not keep copy
WBS	WriteBackShared	Υ		Request to send cache line from owning device to memory, device keeps read-only copy
RIO	ReadIO		Υ·	Request to read IO locations
WIO	WriteIO		Υ	Request to write IO locations
INT	Interrupt			Sends an interrupt, target is specified by address

Fig. 7

Transaction Type	Initiator Receives	Initiator Sends
RTS	DATA	
RTO	DATA	
RTWB	DATA & PRN	DATA
RS	DATA	
WS	ACK & PRN .	DATA
WB	PRN	DATA or NACK
WBS	PRN	DATA or NACK

Fig. 8

Transaction Type	Initiator Receives	Initiator Sends
RIO	DATA	
WIO	PRN	DATA
INT	PRN or NACK	DATA or Nothing

Fig. 9

Access Rights Symbol	Access Rights Name	Description	Data Present?
W	Write	Read and Write	Yes
A	All-Write	Write-only, must write entire cache line	Yes (or ACK)
R	Read	Read-only	Yes
Т	Transient-Read	Read-only, read can be reordered	Yes
1	Invalid	No access rights	Yes or No

Fig. 10A

Ownership Status Symbol	Ownership Status Name	Description	Data Present?
0	Owner	Owns cache line	Yes or No
N	Not Owner	Does not own cache line	Yes or No

Fig. 10B

Access Right	Ownership Status
W	0
R	0
1	0
W	N
Α	N
R	N
Τ	N
1	N

Fig. 10C

Transaction Type	New Owner
RTS	Previous Owner
RTO	Initiator
RTWB	Memory
RS	Previous Owner
WS	Memory
WB	Memory (or Previous Owner)
WBS	Memory (or Previous Owner)

Fig. 11

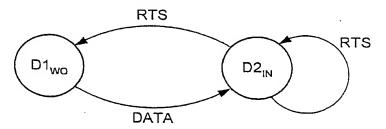


Fig. 12A

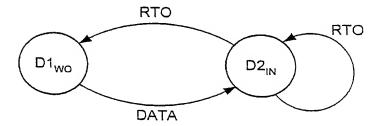
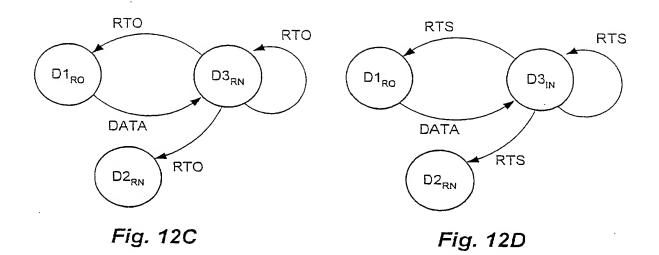
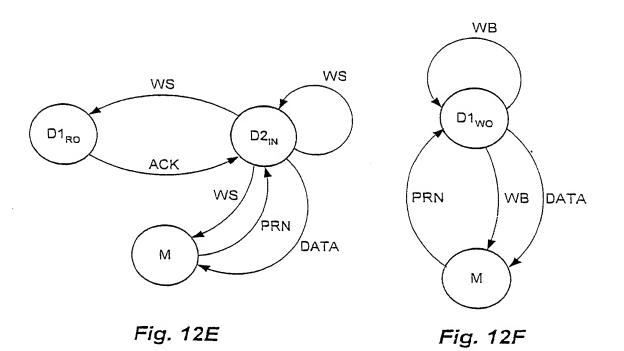
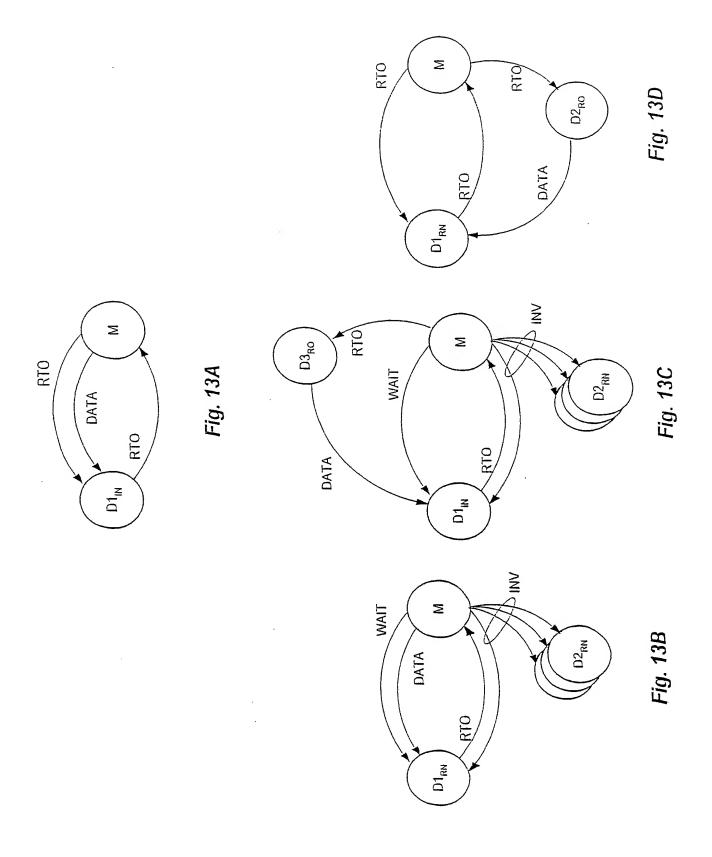
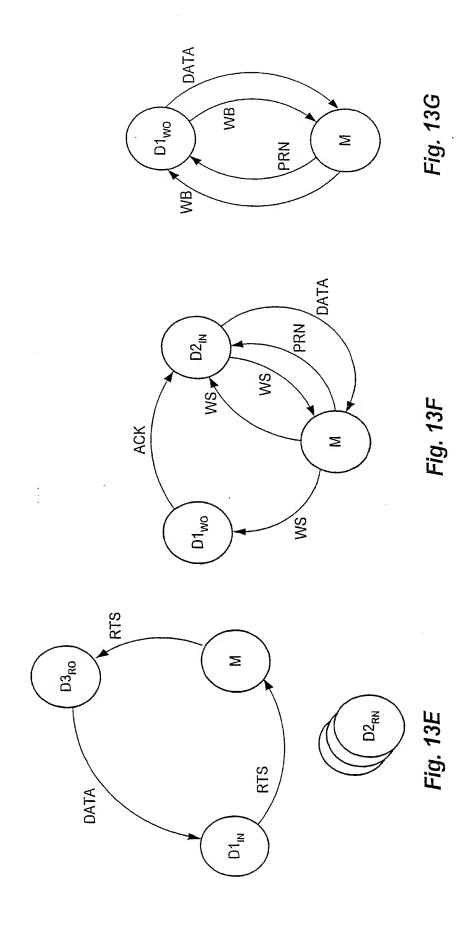



Fig. 12B









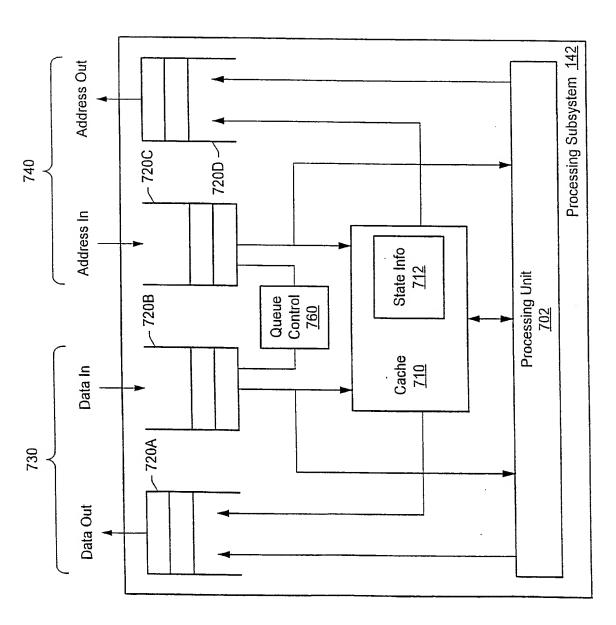

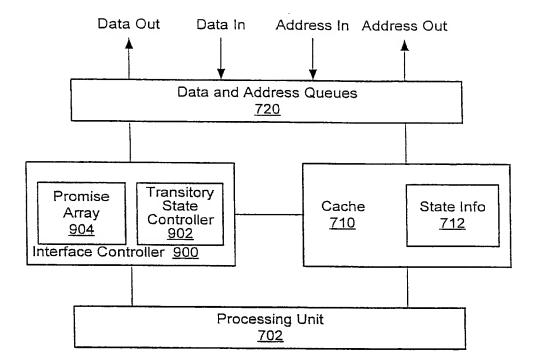


Fig. 15

	tateDescription
NOth	:Waiting for WAIT and ACK for local WS, has write access and ownership
WO.	Stable state with write access and ownership
ROfh	Waiting for WAIT and ACK for local WS, has read access and ownership
₹Oe	Waiting for DATA for local RTO, has read access and ownership
ROde	Waiting for INV and DATA for local RTO, has read access and ownership
ROd	Waiting for INV for local RTO, has read access and ownership
ROce	Waiting for WAIT and DATA for local RTO, has read access and ownership
30	Stable state with read access and ownership
.Oe	Waiting for DATA for local RTO, has no access rights, has ownership
Ode	Waiting for INV and DATA for local RTO, has no access rights, has ownership
Оd	Waiting for INV for local RTO, has no access rights, has ownership
WNj	Able to send DATA/NACK for local WB/WBS, has write access and no ownership
WNI	Able to send DATA for local RTWB. write access, no ownership
WNh	Waiting for ACK for local WS, has write access, no ownership
WNc	Waiting for WAIT for local RTO, has write access, no ownership
WN	Stable state with write access, no ownership (caused by foreign transaction that took ownership, but for which no
	Poblager up let neem beministral
ANi	Able to send DATA for local WS after performing write to entire cache line, no ownership
RNj	Able to send DATA/NACK for local WB/WBS, has read access and no ownership
RNh	Waiting for ACK for local WS, has read access, no ownership
RNg	Waiting for INV for local WS, has read access, no ownership
RNe	Waiting for DATA for local RTO, has read access, no ownership
RNde	Waiting for INV and DATA for local RTO, has read access, no ownership
RNd	Waiting for INV for local RTO, has read access, no ownership
RNce	Waiting for WAIT and DATA for local RTO, has read access, no ownership
RNcd	Waiting for WAIT and INV for local RTO, has read access, no ownership
RN	Stable state with read access, no ownership
TN	Performing read(s), which may be reordered, for local RTS or RS, no ownership
iNk	Waiting for local RTO, RTWB, WS, WB or WBS after receiving an ERR or ERR! No access rights, an even-
INI	Able to send DATA/NACK for local WB/WBS, has no access rights and no ownership
INh	Waiting for ACK for local WS or for DATA for local RTWB, has no access rights, no ownership
lNg	waiting for thy for local WS or for INV for local RTWB, has no access rights, no nymership
INe	Waiting for DATA for local RTO, has no access rights, no ownership
INda	Waiting for INV and DATA for local RTO, has no access rights, no ownership
INd	Waiting for INV for local RTO, has no access rights, no ownership
INce	Waiting for WAIT and DATA for local RTO, has no access rights, no ownership
INcd	Waiting for WAIT and INV for local RTO, has no access rights, no ownership
lNa	Waiting for DATA for local RTS, DATA may grant read access, has no access rights, no ownership
IN	Stable state with no access rights, no ownership

FIG. 15A

Action		
Code	Meaning	Comments
/a	Commit to send an ACK packet as a copyback by appending an entry for the received foreign packet in a copyback list. Set copy tag to I.	ACK packet may be sent from any state that allows copyback packets to be sent. It must be sent within a finite time of first entering such a state, regardless of what other packets have been received.
cl	Commit to send DATA and/or ACK packets for all outstanding copybacks for this cache line. Next, set copy tag to W. Then, perform state transition based on current state & local packet being received.	If sending copybacks changes the state from a state X to a state Y, the local packet being received will be received in state Y (and as a result, the entry for state Y in the table must be consulted to determine the state transition caused by receiving the local packet).
/d	Commit to send DATA packet for local RTWB, WS, WB, or WBS transaction. DATA packet is sent in response to receiving a PRN packet for this transaction.	DATA packet may not be sent until a PRN packet is received. It must be sent within finite time of receiving the PRN packet & having entered a state that permits the packet to be sent, regardless of what other packets have been received.
e/	Clear outstanding copyback commitments for this line by removing them from the copyback list. Do not send DATA or ACK packets for entries that were on the copyback list. Next, perform state transition based on current state & local packet being received.	This action code is used in response to receiving an ERR or ERRL packet. If an ERR packet was received in place of a PR or PRACK packet, or if an ERRL packet was received in place of a DATAP packet, a DATA packet may be sent to the error device.
/i	Commit to send a DATA packet as a copyback by appending an entry for the received foreign packet in the copyback list. Set copy tag to I.	DATA packet may be sent from any state that allows copyback packets to be sent. It must be sent within finite time of first entering such a state, regardless of what other packets have been received.
/j	Set write tag to I.	MILE Gallet Basicals Have Basic reasived.
/n	Commit to send NACK packet for local WB or WBS transaction & set write tag to W. NACK packet is sent in response to receiving a PRN packet for this transaction.	NACK packet may be sent at any time after receiving the PRN packet. It must be sent within finite time of receiving the PRN packet, regardless of what other packets have been received.
/r	Commit to send a DATA packet as a copyback by appending an entry for the received foreign packet in the copyback list. If copy tag is W, set copy tag to R.	DATA packet may be sent from any state that allows copyback packets to be sent. It must be sent within finite time of first entering such a state, regardless of what other packets have been received.
/s	Set write tag to R.	
/w	Commit to send a DATA packet as a copyback by appending an entry for the received foreign packet in the copyback list.	DATA packet may be sent from any state that allows copyback packets to be sent. It must be sent within finite time of first entering such a state, regardless of what other packets have been received.
/y	if copy tag is R, set copy tag to I.	Used to record invalidating transactions while a copyback for a foreign memory remap is pending.
/Z	If write tag is R, set write tag to I.	Used to record invalidating transactions while a local WBS transaction is pending.

ROG ROG ROG State Send on Address Network RTS (a) RS RTWB WS/WB WBS TO WES DATA for RTS c/TNc/IOe DATA for RTO MNi/d RTWB/INV for RTWB (g) WN; DATA for RTWB (h) NAIT for WS INV for WS c/RNg WNj/d WB/WBS ERRL for RTS/RS e/IN Send DATA or NACK

Fig. 150

BEST AVAILABLE COPY

	•	Receive								Send DATA or ACK copyback packet	
Old State		RS	RTS	RTO/ RTWB	٧S	NV	MRM	MDM	Copy tag W	Copy tag R	Copy tag I
VOfh		/w	/r	WNh/i	WNh/a				_	ROfh	
VO	i	/w	/r	WN/i	WN/a	/z	WN/r	WN/i	]	RO	
Ofh	i	/w	/r	RNh/i	RNh/a	<b> </b>		· ·			
Oe		/w	/r	RNe/i	RNe/a	IOe	RNe/r	RNe/i	, de		
Öde		/w	/r	RNde/i	RNde/a	IOde	• .	į			
Od		/w	<b>/r</b>	RNd/i	RNd/a					7.2 m	
Oce		/w	/r	RNce/i	RNce/a		.3	-	4		
0		/w	/r	RN/i	RN/a	/z	RN/r	RN/i			
Эе		/w	/r	INe/i	INe/a		INe/r	INe/i	4	2.5 XI	
Ode		/w	<b>/r</b>	INde/i	INde/a			1			
Od		/w	/r	INd/i	INd/a	i	. 130%			Facility.	
VNi	i			İ							
VNh	1	1		1						RNh	INh
VNc	1		1	** ·*	1						1
VNj	1	1		/yz	/yz	/z		/yz		RNj	INj
VN	i		1	/y	/у	/z		/y		RN	IN
Ni	1		1		T .						+
Nh						INh					INh
Ng	ì		T								1.
Ne			T	/y	/у	INe		/y	250		1024
Nde	1		T			INde		1	12.	1.462.	
Nd									19.	4-74-7	
Nce	1					INce					INce
Ncd	1								•	4	î
Nj	1			INj	ĮNj	INj		INj		L	INj
N	1		1	IN	IN	IN		IN			IN
N	1		T				i		ina vein	and work of species	
Nh	1		T						1		
Ng	1		T	N				i		. :	-
Ne				/у	// y			/у	200	1000	WHO W
Nde				11.75						k tra	
Nd									1	10.50	1 18 1 21
Nce							<u></u>				
Ncd											
Nk								1			
Nj											
Na	1			IN	IN	IN		IN			
N					İ						

Fig 15D





Fig. 16



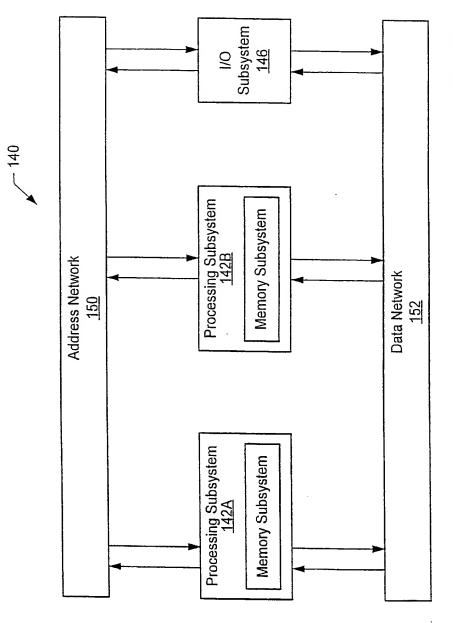


Fig. 18

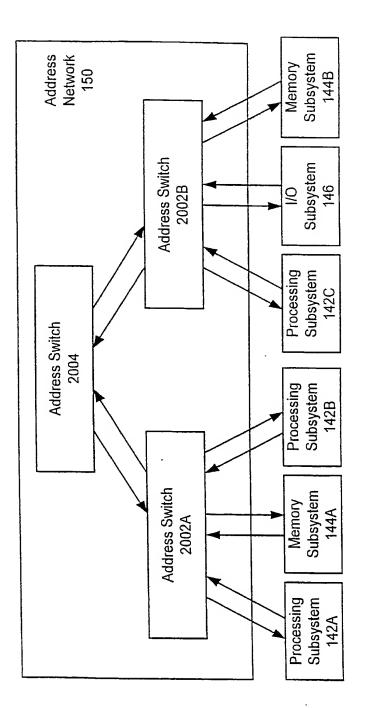


Fig. 19

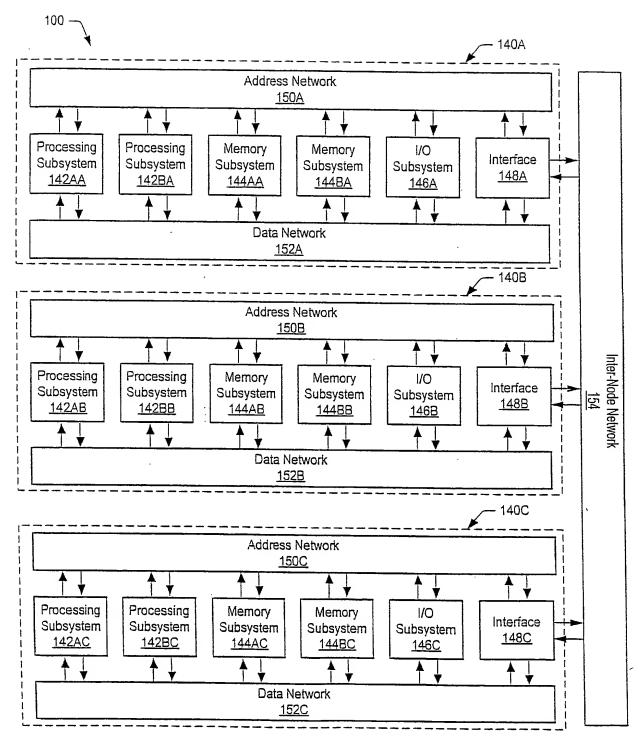


Fig. 20

gTag	Description
gM	The maximum access right within the node is Write Access
gS	The maximum access right within the node is Read Access. No client device in the node can have Write Access.
gl	The maximum access right within the node is Invalid Access. No client device in the node can have Read or Write Access.

Fig. 21

Packet		Address Space			
Туре	Full Name	Cacheable	1/0	Description	
PRTS	Proxy RTS	Υ		Request from an interface in a gS or gI node in response to an RTS request from another node	
PRTSM	Proxy RTS Modified	Υ		Request from an interface in a gM node in response to an RTS request from another node	
PRTOM	Proxy RTO Modified	Y		Request from an interface in a gM node in response to an RTO request from another node	
PRTO	Proxy ReadToOwn	Υ		Request from an interface in response to an RTO request from another node	
PU	Proxy Upgrade	Υ		Request from an interface asking memory to supply data for an outstanding RTO	
PDU	ProxyDataUpgrade	Υ		Request from an interface asking memory to update gTag to gM; interface supplies data for an outstanding RTO	
PRSM	Proxy ReadStream Modified	Υ .		Request from an interface in a gM node in response to RS request from another node	
PIM	ProxyInvalidate Modified	Y		Request from an interface in a gM node to invalidate data in caches and memory	
Pl	ProxyInvalidate	Y		Request from an interface in a gS or gl node to invalidate data in caches and memory	
PMR	ProxyMemoryRead	Υ		Request from an interface to memory to read coherency state(s) and data or meta-data	
PMW	ProxyMemoryWrite	Y		Request from an interface to memory to write coherency state(s) and data or meta-data	

Fig. 22

Packet Type	Full Name	Description
DATAM	Data-Meta	Data packet containing data and coherence state information
DATAN	Data-NoPull	Data packet sent in response to PRTSM indicating no PRN will be coming
REP	Report	Report from memory to an interface indicating a transaction to be handled by the interface

Subtransaction	Preexisting Global Access State	New Global Access State
PRTSM	Modified .	Shared
PRTOM	Modified	Invalid
PRTO	Shared, Invalid	Invalid
PU	Shared	Modified
PDU	Shared, Invalid, Modified	Modified
PRSM	Modified	Unchanged
PIM	Modified	Invalid
PI	Shared, Invalid	Invalid
PMR	Shared, Invalid, Modified	Unchanged
PMW	Shared, Invalid, Modified	Equal to new global access state specified in DATAM packet

Fig. 24

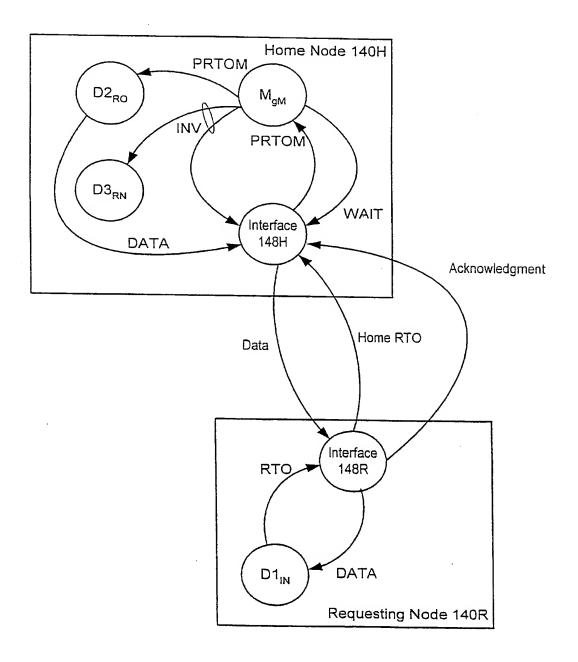


Fig. 25

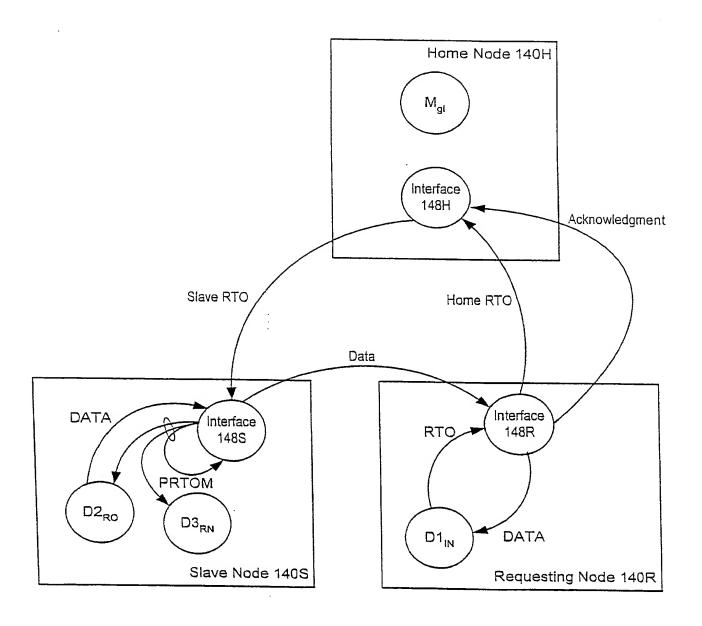


Fig. 26

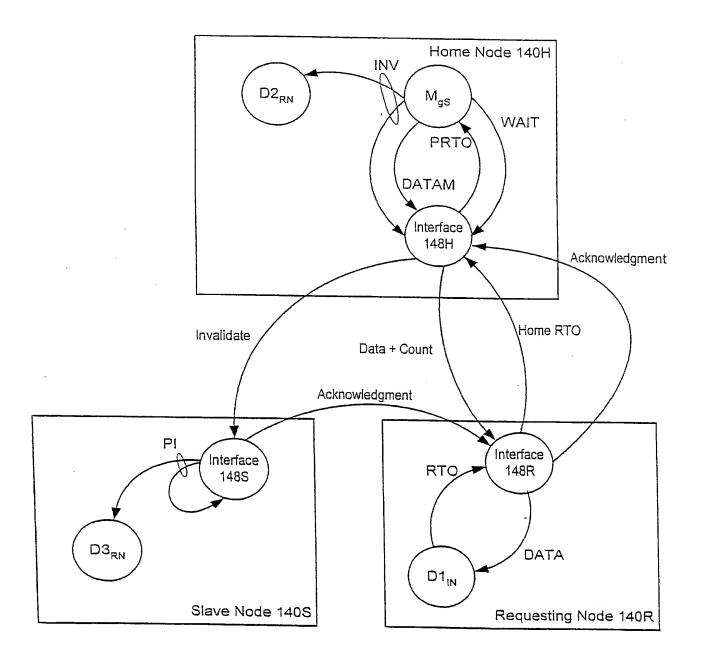


Fig. 27

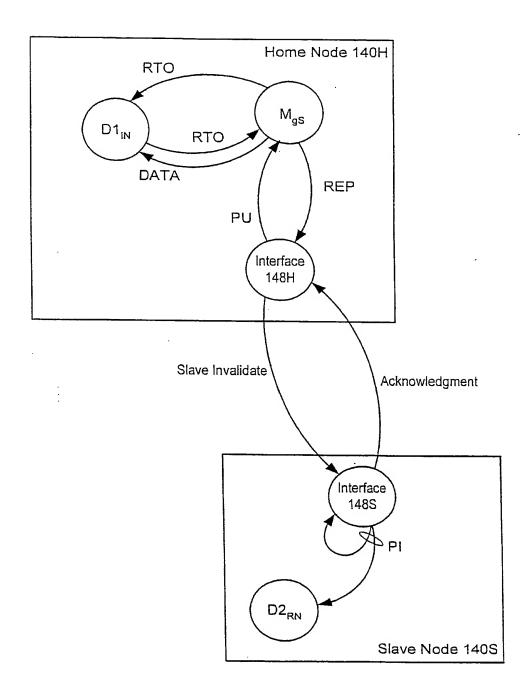


Fig. 28

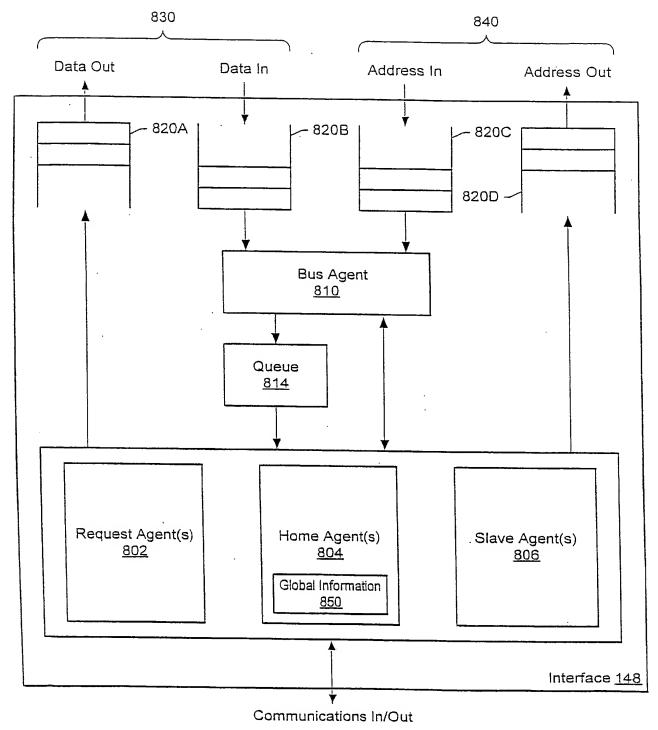


Fig. 29

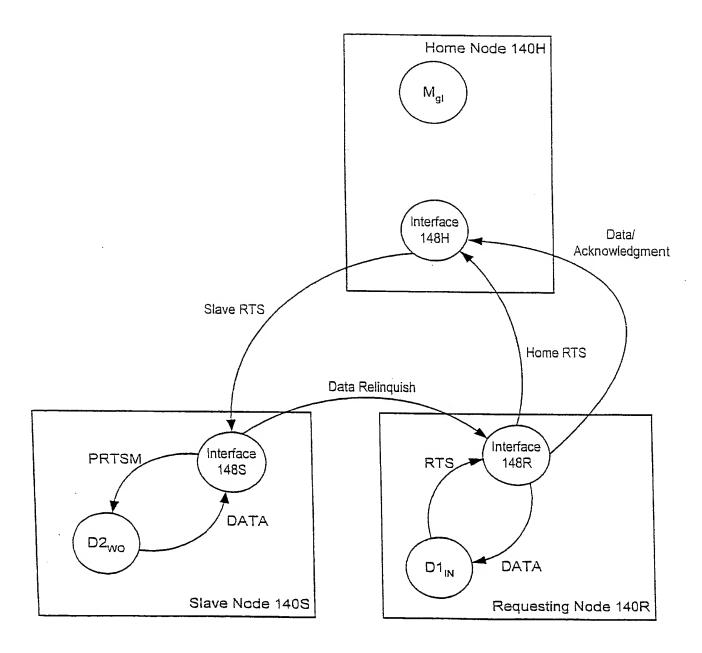


Fig. 30

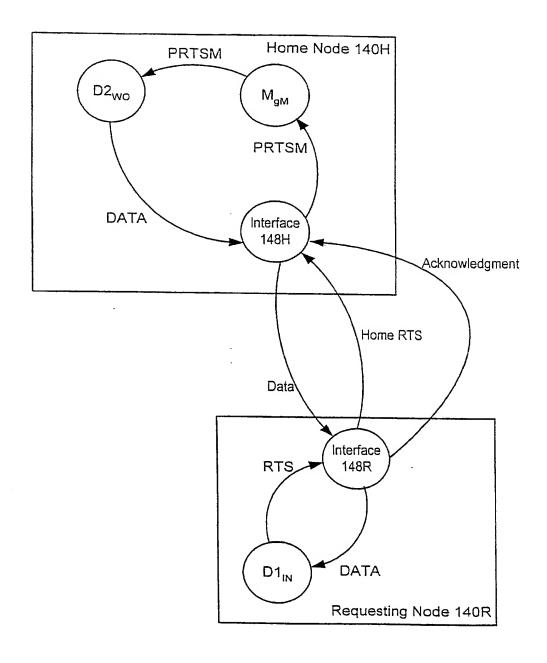


Fig. 31

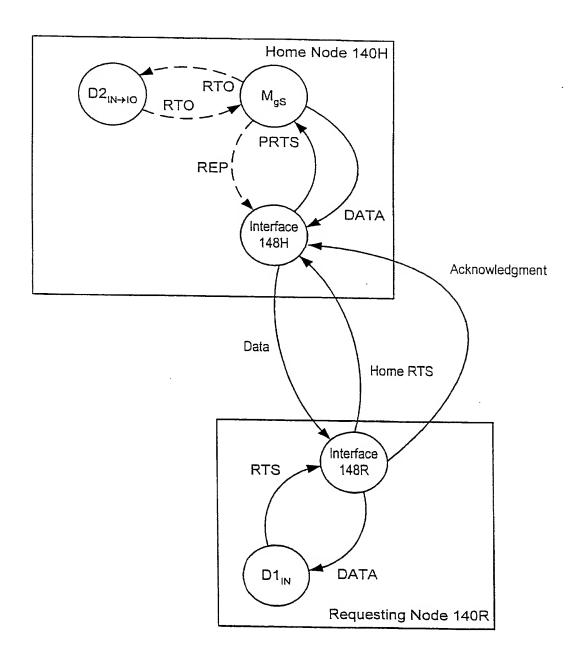


Fig. 32

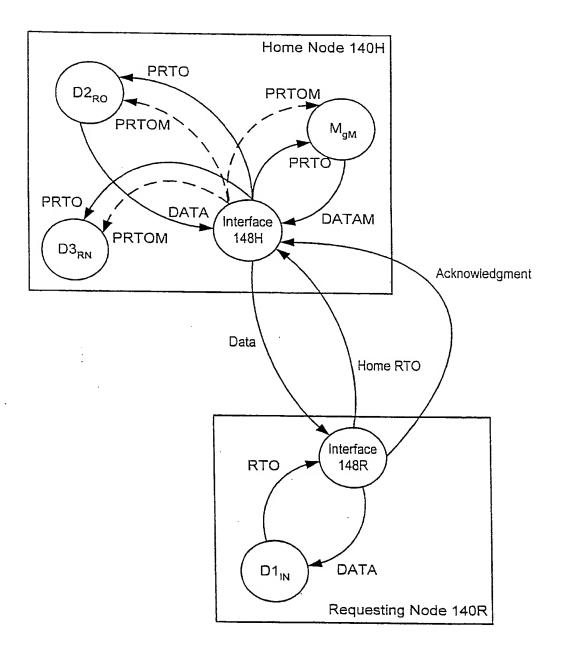


Fig. 33

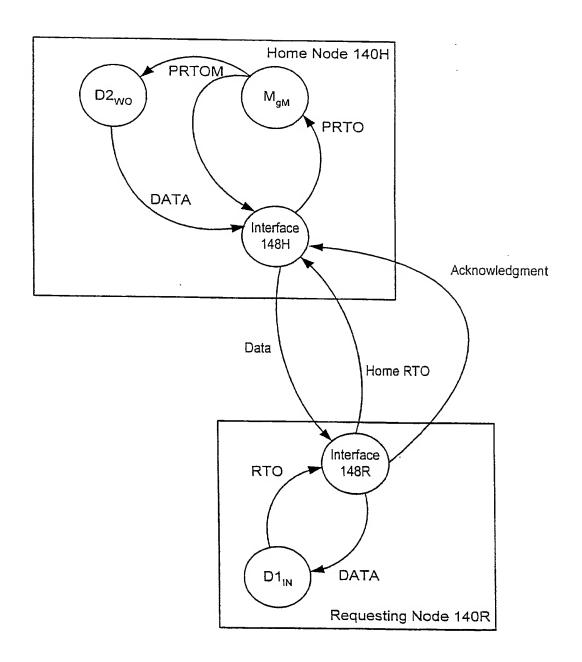


Fig. 34

Response Info	gTag	Home Memory Subsystem Action
No	gM	BC Mode Allow owning device to respond. PTP Mode Forward response to owning device
No	gS	Send REP packet to interface if write access requested
No	gl	Send REP packet to interface
Yes	gM	Respond with copy of the requested coherency unit

Fig. 35

Response Info	Memory Subsystem's Action
mΝ	Does not respond with copy of coherency unit because a cache within the node owns the coherency unit
mR	Does respond because memory is the owner
mS	Does respond to requests for shared access because memory has shared copy and no active device has ownership; does not respond to requests for write access
ml	Does not respond because memory's copy is invalid

Fig. 36

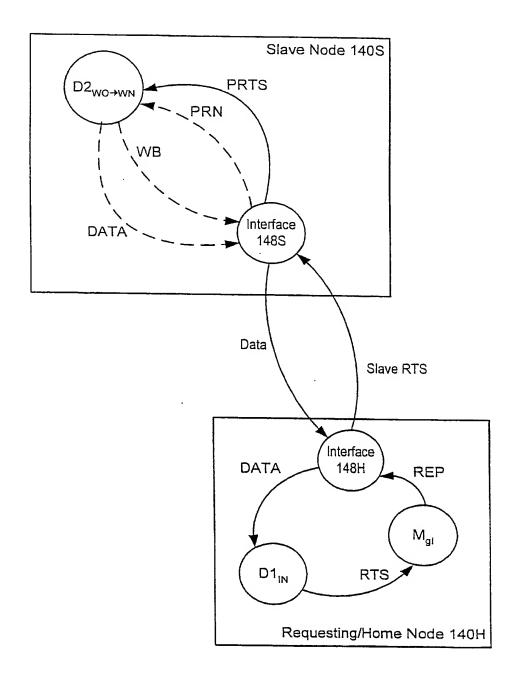
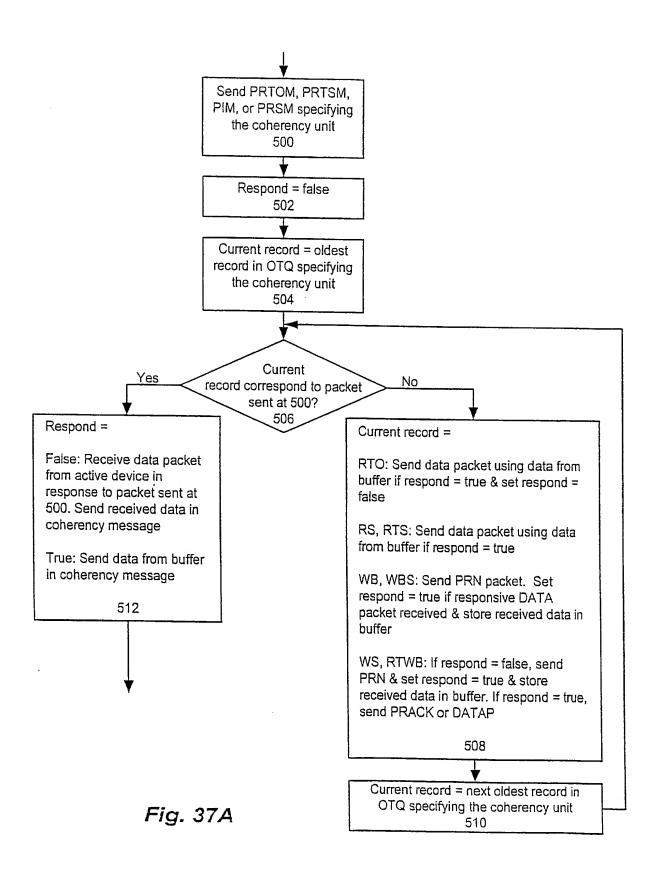


Fig. 37



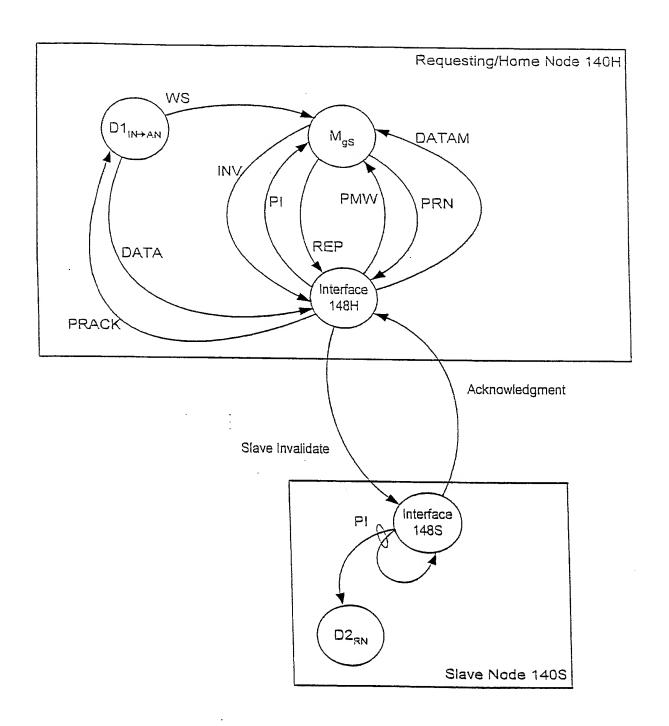


Fig. 38

Packet Type	Full Name	Description
RWB	Remote WB	Request sent from an active device in a multi- node system to an interface in order to initiate a WB transaction
RWBS	Remote WBS	Request sent from an active device in a multi- node system to an interface in order to initiate a WBS transaction
RWS	Remote WS	Request sent from an active device in a multi- node system to an interface in order to initiate a WS transaction

Fig. 39

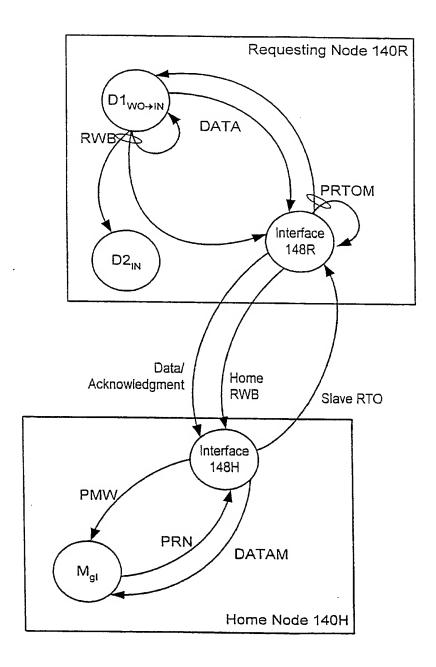


Fig. 40

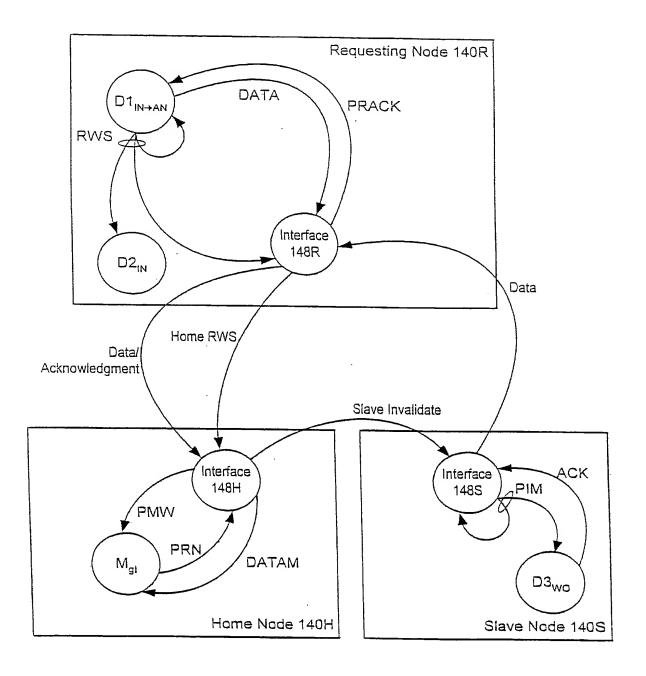


Fig. 41